




### Accessories & Replacement Parts:

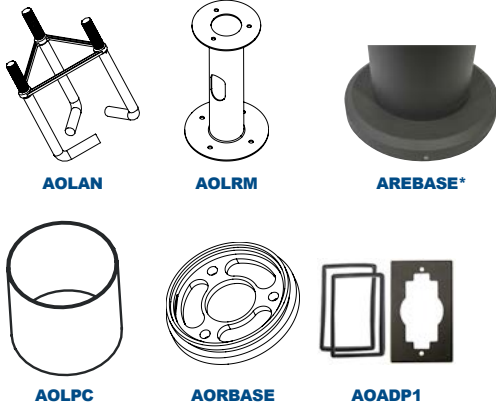

\*Shown Mounted

Mounting Accessories (Order Separately, Field Installed)	
AOLAN4	Mounting Kit, Includes Bracket & Three (3) 4" Anchor Bolts
AOLAN8	Mounting Kit, Includes Bracket & Three (3) 8" Anchor Bolts
AOLAN12	Mounting Kit, Includes Bracket & Three (3) 12" Anchor Bolts
AOLAN15	Mounting Kit, Includes Bracket & Three (3) 15" Anchor Bolts
BOLRM	Root Mount Kit
AREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all FenWall Bollards. Die Cast with Powdercoat Finish, Hardware Included. 1 1/2" Dia. x 1 1/2" H


\*Specify Color: Z=Bronze, B=Black, C=Custom (Consult Factory)

Replacement Parts (Order Separately, Field Installed)	
AOLPC	Replacement Round Polycarbonate Vandal-Resistant Lens
AORBASE*	Die Cast Base Plate with Powdercoat Finish Over a Chromate Conversion Coating.
AOADP1	Adapter Plate with Gaskets for Outlet Boxes. Fits Round Bollards. Die Cast with Bronze Powdercoat Finish.


\*Specify Color: Z=Bronze, B=Black

For Replacement Battery Backup, see the LED Battery Backup Specification Sheet.


### Photometric Data

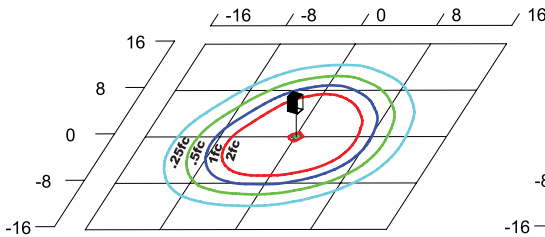

**AOFG3QF1X15U5K Type V** Grid in feet, Mounting Height = 3.5 ft.

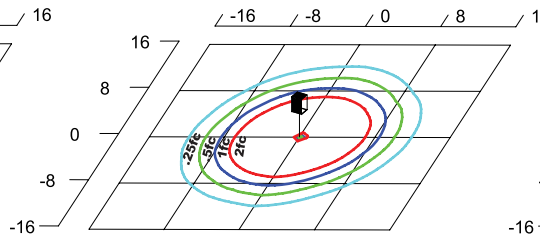

**AOFG5QF1X15U5K Type V** Grid in feet, Mounting Height = 3.5 ft.

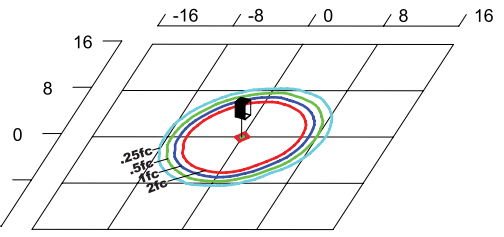

**AOFRLQF1X15U5K Type V** Grid in feet, Mounting Height = 3.5 ft.

### Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI					4000 CCT 80 CRI					3000 CCT 80 CRI				
				Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
EasyLED 15w	116	17	AOFG3 Type III Glass	1,152	68	1	3	1	1,106	65	1	3	1	1,020	60	1	3	1
			AOFG5 Type V Glass	1,125	66	1	3	1	1,080	64	1	3	1	905	53	1	3	1
			AOFL Louvers	778	46	1	2	1	747	44	1	2	1	689	41	1	2	1
			AOFRL Cone Reflector	1,519	89	1	3	1	1,458	86	1	3	1	1,225	72	1	3	1
			AOFRL Type III Optic	1,081	64	0	3	1	989	58	0	2	1	918	54	0	2	1

### Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 25°C
L70 Lumen Maintenance @ 25°C / 77°F	17	1.00	0.95	0.90	0.80	147,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L70@ 50°C
L70 Lumen Maintenance @ 50°C / 122°F	17	1.00	0.89	0.78	0.55	67,000
TM-21-11	Input Watts	Initial	25,000 Hrs	50,000 Hrs	100,000 Hrs	Calculated L80@ 40°C
L80 Lumen Maintenance @ 40°C / 104°F	17	1.00	0.92	0.85	0.70	66,000

**NOTES:**  
 1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 116mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.  
 2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.