FenWall
FABRICATION & MANUFACTURING

Reveal Round & Square Bollards

EasyLED Technology

Accessories & Replacement Parts:



AOLAN

AREBASE*

AOADP1

*Shown Mounted

Mounting Accessories (Order separately, Field installed)	
AOLAN4	Mounting Kit, Includes Bracket & Three (3) 4ê Anchor Bolts
AOLAN8	Mounting Kit, Includes Bracket & Three (3) 8ê Anchor Bolts
AOLAN12	Mounting Kit, Includes Bracket & Three (3) 12ê Anchor Bolts
AOLAN15	Mounting Kit, Includes Bracket & Three (3) 15ê Anchor Bolts
AREBASE*	Bollard Retrofit Base Kit Adapts New Bollards to Most Existing Bolt Patterns. Fits all FenWall Bollards. Die Cast with Powdercoat Finish, Hardware Included. 11 Í ê Dia. x 1 Í ê H
*Specify Color: Z=Bronze, B=Black, W=White, G=Gray, C=Custom (Consult Factory)	

Replacement Parts (Order separately, Field installed)	
AOADP1*	Adapter Plate with Gaskets for Outlet Boxes. Fits Round Bollards. Die Cast with Powdercoat Finish.
*Specify Color: Z=Bronze, B=Black, W=White, G=Gray, C=Custom (Consult Factory)	

Photometric Data

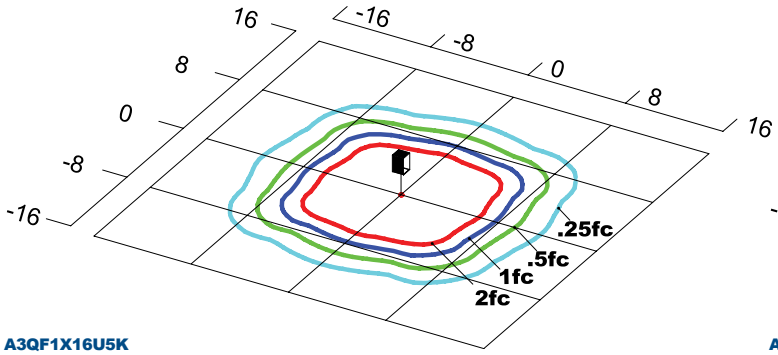

A3QF1X16U5K
Type V
Grid in feet, Mounting Height = 3.5 ft.

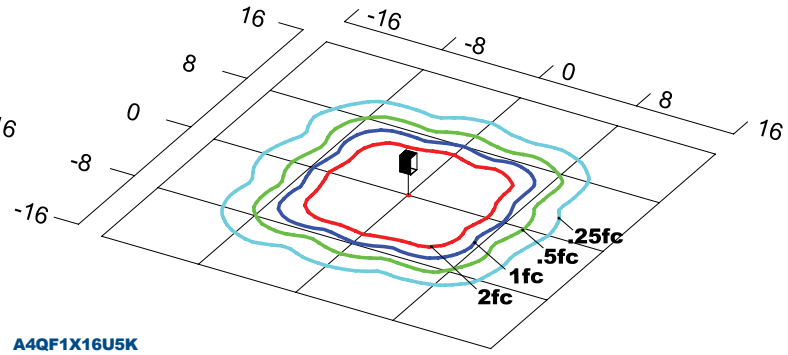

A4QF1X16U5K
Type V
Grid in feet, Mounting Height = 3.5 ft.

Photometric Performance

LED Board Watts	Drive Current (mA)	Input Watts	Optics	5000 CCT 80 CRI Lumens	LPW	B	U	G	4000 CCT 80 CRI Lumens	LPW	B	U	G
EasyLED 16w	525	20	B3 Type V	1,603	80	1	2	1	1,539	77	1	2	1
			B4 Type V	1,678	84	1	2	1	1,611	81	1	2	1

Projected Lumen Maintenance

Data shown for 5000 CCT			Compare to MH			
TM-21-11	**Input Watts**	**Initial**	**25,000 Hrs**	**50,000 Hrs**	**100,000 Hrs**	**Calculated L70@ 25°C**
A3 L70 Lumen Maintenance @ 25°C / 77°F	20	1.00	0.96	0.92	0.84	187,000
A4 L70 Lumen Maintenance @ 25°C / 77°F	20	1.00	0.96	0.92	0.84	187,000
TM-21-11	**Input Watts**	**Initial**	**25,000 Hrs**	**50,000 Hrs**	**100,000 Hrs**	**Calculated L70@ 50°C**
A3 L70 Lumen Maintenance @ 50°C / 122°F	20	1.00	0.94	0.87	0.74	117,000
A4 L70 Lumen Maintenance @ 50°C / 122°F	20	1.00	0.93	0.87	0.73	113,000
TM-21-11	**Input Watts**	**Initial**	**25,000 Hrs**	**50,000 Hrs**	**100,000 Hrs**	**Calculated L80@ 40°C**
A3 L80 Lumen Maintenance @ 40°C / 104°F	20	1.00	0.97	0.93	0.87	151,000
A4 L80 Lumen Maintenance @ 40°C / 104°F	20	1.00	0.97	0.93	0.86	144,000

NOTES:
1. Projected per IESNA TM-21-11. Data references the extrapolated performance projections for the 525mA base model in a 25°C ambient, based on 10,000 hours of LED testing per IESNA LM-80-08.
2. Compare to MH box indicates suggested Light Loss Factor (LLF) to be used when comparing to Metal Halide (MH) systems.

©2018 FenWall / Tampa, FL, USA / Phone: 813-343-5979 / www.fenwalls.com / info@FenWalls.com / 13929 Lynmar Boulevard, Tampa, FL 33626